




Approved standard: UL778
CSA C22.2 no.108-01

silent+

MINI LIME

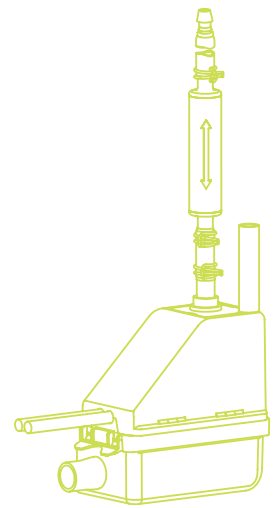

PART NO. VARIOUS

GB

DESCRIPTION

- Completely reversible
- Quick and easy to install

Completely unique, in both design and installation advantages. The pump is clipped directly onto the reservoir so there is minimal suction lift. By connecting the drain hose to the reservoir of the pump unit, condensate water can be pumped away to a suitable drain.

IN THE BOX


- 1 x Assembled Silent+ Mini Lime® pump with 150mm Vinyl breather tube 6mm ID
- 1 x Acoustic damper and 1m lime discharge tube with connector
- 1 x Anti Siphoning Device
- 1 x 220mm Lime Inlet hose 14mm ID
- 1 x Elbow front and back
- 1 x Conduit front and back
- 1 x 800mm Internal conduit sleeve (Slimline system only)
- 1 x Gasket (Slimline, BBJ and Inoac/Inaba systems only)
- 1 x Ceiling plate
- 2 x Cable ties 140 x 3.6mm
- 4 x Cable ties 300 x 3.6mm
- 6 x Rawl plugs and screws

SPECIFICATIONS

- Pump rating: 230V AC, 16W
- 1PH 50 Hz
- 3A volt-free alarm wires, N.O., N.C. contacts rated @ 5A inductive at 230V
- Hall effect semi conductor level sensors, with high level safety
- Maximum water temperature: 40°C
- Continuously rated
- Class II appliance
- Fully potted
- Thermally protected
- 79mm (h) x 99mm (w) x 44mm (d)
- Weight: 0.31kg

PERFORMANCE

- Water flow rate: 12L/h at zero head
- Maximum recommended head: 10m
- 21dB(A) @ 1m

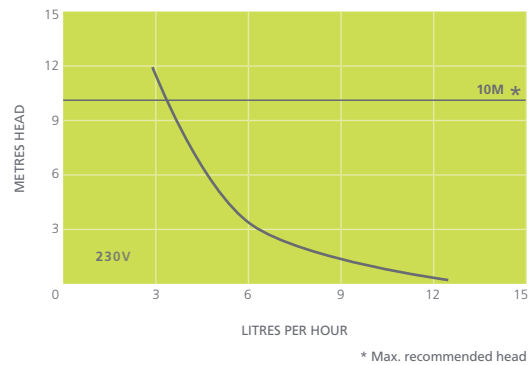

HORIZONTAL LOSSES

L/h		Horizontal (max 100)		
		30m	60m	90m
Vertical Head	3m	7.6	7.6	7.6
	2m	8.3	8.3	8.3

AVAILABLE SYSTEMS

Product Description	Part No.	
Slimline	Ivory	FP3312
	White	FP3319
BBJ	Ivory	FP3316
	White	FP3320
Inoac	Ivory	FP3317
	White	FP3321
Artiplastic	Ivory	FP3315
Replacement Pack		FP3322