


# silent+

## MINI ORANGE

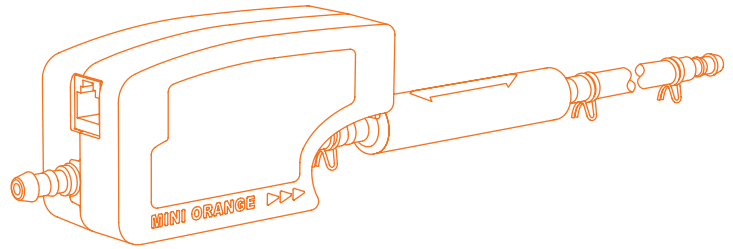

PART NO. FP3313

GB

### DESCRIPTION

The Silent+ Mini Orange® allows great installation flexibility. It gives optimum performance and quietest operation.

- Low noise, high performance motor
- Acoustic damper
- Anti-vibration tubing
- Plug and play connection
- Clear reservoir for easy inspection
- Quietest in it's class

### IN THE BOX


- 1 x Assembled Silent+ Mini Orange® pump
- 1 x Acoustic damper and 1m orange discharge tube with connector
- 1 x Anti Siphoning Device
- 1 x Anti vibration bracket
- 1 x 1.5m 6-pin socket lead assembly
- 1 x Reservoir
- 1 x Reservoir lid with 1.5m sensor cable
- 1 x Submersible reservoir
- 1 x Float and Filter
- 1 x 1.5m Suction tube 6mm ID
- 1 x 220mm Orange inlet hose 14mm ID
- 1 x 150mm Vinyl breather tube 6mm ID
- 1 x Drain tray connector
- 2 x Cable ties 140 x 3.6mm
- 4 x Cable ties 300 x 3.6mm
- 2 x Velcro strips

### SPECIFICATIONS

- Pump rating: 230V AC, 16W
- 1PH 50 Hz
- 3A volt-free alarm wires, N.O., N.C. contacts rated @ 5A inductive at 230V
- Hall effect semi conductor level sensors, with high level safety
- Maximum water temperature: 40°C
- Continuously rated
- Class I appliance
- Fully potted
- Thermally protected
- 51mm (h) x 107mm (w) x 39mm (d)
- Weight: 0.25kg

### PERFORMANCE

- Water flow rate: 12L/h at zero head
- Maximum recommended head: 10m
- 19dB(A) @ 1m

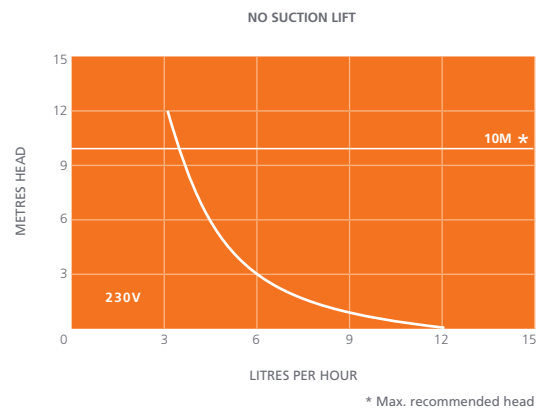

### HORIZONTAL LOSSES

Vertical Head	L/h	Horizontal (max 100)		
		30m	60m	90m
3m	3m	7.2	7.0	6.6
	2m	7.3	7.1	7.1