

# maxi lime

PART NO. VARIOUS

GB

## DESCRIPTION

- Completely reversible
- Quick and easy to install

Completely unique, in both design and installation advantages. The pump is clipped directly onto the reservoir so there is minimal suction lift. By connecting the drain hose to the reservoir of the pump unit, condensate water can be pumped away to a suitable drain.

## IN THE BOX


- 1 x Assembled Maxi Lime pump with 750mm discharge tube with connector 6mm ID and length of insulation
- 1 x Anti Siphoning Device
- 1 x 220mm Lime Inlet hose 14mm ID
- 1 x 150mm Vinyl breather tube 6mm ID
- 1 x Elbow front and back
- 1 x 800mm Conduit front and back
- 1 x Gasket (BBJ and Inoac/ Inaba systems only)
- 1 x Ceiling plate
- 2 x Cable ties 140 x 3.6mm
- 4 x Cable ties 300 x 3.6mm
- 6 x Rawl plugs and screws

## SPECIFICATIONS

- Pump rating: 230V AC, 15W
- 1PH 50 Hz
- 3A volt-free alarm wires, N.O., N.C. contacts rated @ 5A inductive at 230V
- Hall effect semi conductor level sensors, with high level safety
- Maximum water temperature: 40°C
- Continuously rated
- Class II appliance
- Fully potted
- Thermally protected
- 115mm (h) x 99mm (w) x 44mm (d)
- Weight: 0.47kg

## PERFORMANCE

- Water flow rate: 34L/h at zero head
- Maximum recommended head: 15m
- 35dB(A) @ 1m

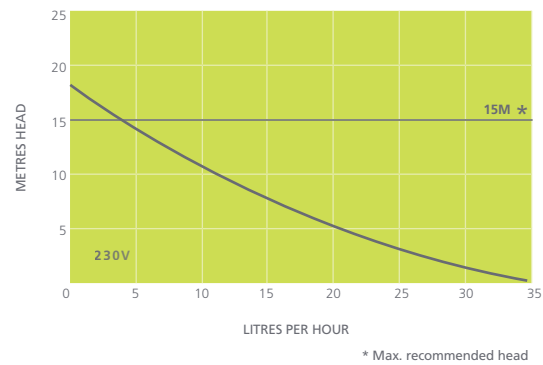

## HORIZONTAL LOSSES

| L/h              | Horizontal (max 100) |     |     |
|------------------|----------------------|-----|-----|
|                  | 30m                  | 60m | 90m |
| Vertical Head 3m | 20                   | 20  | 19  |
| Vertical Head 2m | 22                   | 22  | 21  |

## AVAILABLE SYSTEMS

| Product Description | Part No. |  |
|---------------------|----------|--|
| BBJ Ivory           | FP2213   |  |
| Inoac Ivory         | FP2214   |  |
| Optimal White       | FP2290   |  |
| Artiplastic Ivory   | FP2405   |  |
| Replacement Pack    | FP2215   |  |