

Copper Press Fitting Reducer (M-Profile)

MCP 03



Technical Data

- Working Pressure 16 Bar @ 95°C
- "M" profile press jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid

Applicable Standards

- WRAS approved
- For use with type TX copper tubing conformant to EN 1057
- Manufactured to EN1254 standard




Features & Benefits

- Durable and secure leak proof joint
- Braze free, permanent joint - no hot works required
- Huge time and resource savings
- 25 Year warranty
- Blue plastic film which will fall off when crimped for easy identification of pressed joint
- 2 point press
- Dust Covers

Material Specifications

NO	Description	Materials
1	Body	Cu-DHP (CW024A)
2	Crimp indicator film	PVC, Blue
3	O-Ring	EPDM
4	Dust Cap	PE

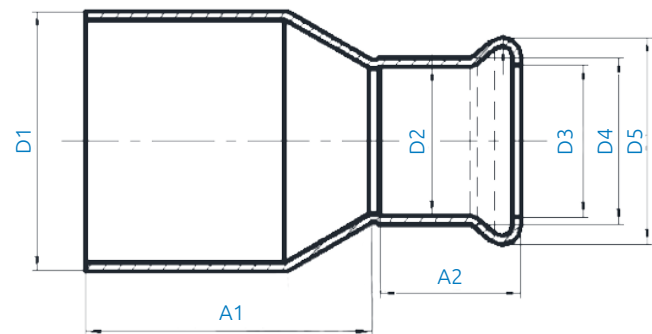

Product Codes and Dimensions

STOCK NO.	D1	D2	D3	D4	D5	A1	A2
27915	22	15	15.6	18	23	31.5	19
27916	28	15	15.6	18	23	36.5	19
27917	28	22	22.8	25	31.3	32	20
27918	35	22	22.8	25	31.3	43	20
27919	35	28	28.8	31	37.4	40	20
27920	42	22	22.8	25	31.3	49	20
27921	42	28	28.8	31	37.4	46	20
27922	42	35	35.7	38.3	44.7	44	25
27932	54	28	28.8	31	37.4	61	20
27923	54	35	35.7	38.3	44.7	58	25
27924	54	42	42.8	45.3	53.5	53	29
28231	67	28	28.8	31	37.4	88	20
28232	67	35	35.7	38.3	44.7	84	25
28233	67	42	42.8	45.3	53.5	78	29

Continued on next page

Copper Press Fitting Reducer (M-Profile)

MCP 03



Product Codes and Dimensions Continued

STOCK NO.	D1	D2	D3	D4	D5	A1	A2
27925	67	54	54.8	57.3	65.3	70	34
28234	76	35	35.7	38.3	44.7	82	25
27926	76	54	54.8	57.3	65.3	76	-
28236	76	67	69.1	71.7	82.6	64	49
28237	108	42	42.8	45.3	53.5	130	29
27929	108	54	54.8	57.3	65.3	113	-
28238	108	67	69.1	71.7	82.6	108	48
27930	108	76	78.6	81.1	94.4	98	-