


# Copper Press GAS Fitting Reducer (M-Profile)

## MGP 03

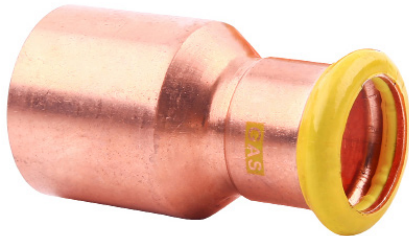

### Features & Benefits

- Durable and secure leak proof joint
- Braze free, permanent joint - no hot works required
- Huge time and resource savings
- 25 Year warranty
- Yellow plastic film which will fall off when crimped for easy identification of pressed joint
- 2 point press
- Dust covers keep O-ring clean prior to assembly

### Material Specifications

NO	Description	Materials
1	Body	Cu-DHP (CW024A)
2	Crimp indicator film	PVC, Ochre Yellow
3	O-Ring	HNBR
4	Dust Cap	PE

### Product Codes and Dimensions

STOCK NO.	D1 (mm)	D2 (mm)	D3 (mm)	D4 (mm)	D5 (mm)	A1 (mm)	A2 (mm)
29679	22	15	15.6	18	23	31.5	19
29680	28	15	15.6	18	23	36.5	19
29681	28	22	22.8	25	31.3	32	20
29682	35	22	22.8	25	31.3	43	20
29683	35	28	28.8	31	37.4	40	20
29685	42	28	28.8	31	37.4	46	20
29686	42	35	35.7	38.3	44.7	44	25
29687	54	28	28.8	31	37.4	61	20
29688	54	35	35.7	38.3	44.7	58	25
29689	54	42	42.8	45.3	53.5	53	29
29692	67	42	42.8	45.3	53.5	78	29
29693	67	54	54.8	57.3	65.3	70	34
29696	76	54	54.8	57.3	65.3	76	-
29697	76	67	69.1	71.7	82.6	64	49
29699	108	54	54.8	57.3	65.3	113	-
29701	108	76	78.6	81.1	94.4	98	-

### Technical Data

- Max Working Pressure 5 Bar (External) / 1 Bar (Internal) @ 70°C
- "M" profile press jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid
- Suitable for above ground 2nd and 3rd family gases to EN437

### Applicable Standards

- For use with type TX copper tubing conformant to EN 1057

