Compression Double Check Valve Bronze NRV 06






Technical Data

- Fields of applications: water
- Max working pressure: PN16
- Operating temperature range: -5°C to +60°C

Applicable Standards

• Compression connections comply with EN1254-2

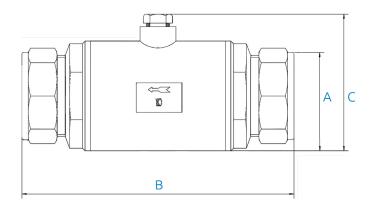

Features and Benefits

- Double check valves when fitted stop the flow of water in one direction preventing back flow.
- Bronze body with compression ends for copper pipework systems.

Versions and Products Codes

STOCK NO	A	В	С
30711	35	149	74.5
30712	42	165	83
30713	54	175	97

Material Specifications

ITEM	PARTS	MATERIAL	QTY
1	Brass	C83600	1
2	Filter	ABS Plastic	1
3	Seals	NBR rubber	2