

Polybutylene Push-fit Female Iron Coupler

PBF 46



Features & Benefits

- 50 Year warranty
- Labour savings of 40%
- All white plastic system
- Twist and Lock push fittings
- Visible Connection
- Strong Stainless Grip Ring
- Permanent anti-leak system
- No tools required

Material Specifications


NO	Description	Materials
1	Body	Brass
2	Collet	Celcon, White
3	Insert Ring	Acetal, White
4	Nut Gasket	EPDM, Black
5	O-Ring	EPDM, Black

Technical Data

- Working Press@ Temp
 - 17 Bar @ 23°C
 - 10 Bar @ 65°C
 - 6 Bar @ 95°C
 - 3 Bar @ 105°C

Applicable Standards

- WRAS approved
- IGC 188-2009
- ASSE1061-2011
- NSF/ANSI- 14,61&372-2015
- Not suitable for hot water re-circulation systems

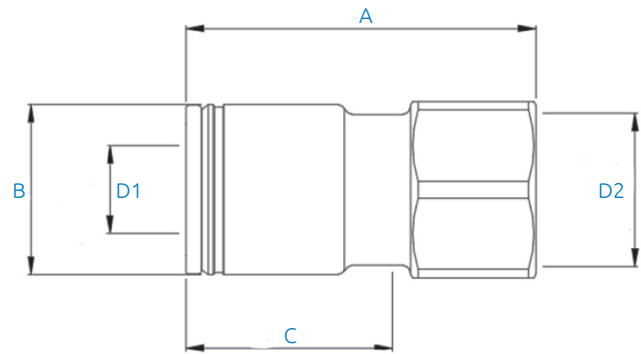

Product Codes and Dimensions

STOCK NO.	D1	D2 (BSPP)	A (mm)	B (mm)	C (mm)
36076	15	1/2"	47.6	23.2	28.1
36077	22	3/4"	55.4	31	33.4