

Polybutylene Push-fit Insert PBF 75



Technical Data

- Working Press@ Temp
 - 17 Bar @ 23°C
 - 10 Bar @ 65°C
 - 6 Bar @ 95°C
 - 3 Bar @ 105°C

Applicable Standards

- WRAS approved
- IGC 188-2009
- ASSE1061-2011
- NSF/ANSI- 14,61&372-2015
- Not suitable for hot water re-circulation systems




Features & Benefits

- 50 Year warranty
- Labour savings of 40%
- All white plastic system
- Twist and Lock push fittings
- Visible Connection
- Strong Stainless Grip Ring
- Permanent anti-leak system
- No tools required

Material Specifications

NO	Description	Materials
1	Body	Polypropylene
2	Colour	White

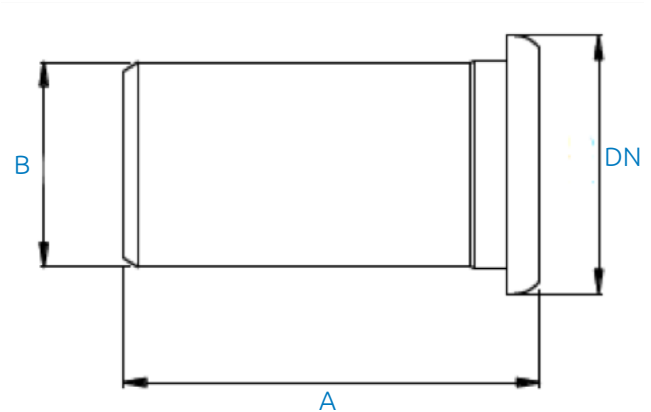

Product Codes and Dimensions

STOCK NO.	DN	A (mm)	B (mm)
36096	15	26	12
36097	22	26	18
36098	28	36	22.5