


# Union Coupling GAS Copper-Press (M-Profile)

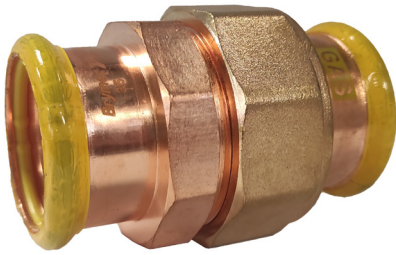

## Features and Benefits

- Durable and secure leak proof joint
- Braze free, permanent joint - no hot works required
- Huge time and resource savings
- 25 Year warranty
- Yellow plastic film which will fall off when crimped for easy identification of pressed joint
- 2 point press
- Dust covers keep O-ring clean prior to assembly

## Material Specifications

Number	Description	Materials
1	Copper Fitting P	C12200
2	O-Ring	HNBR
3	Gasket	HNBR
4	Copper Nut	C37700

## Product Codes and Dimensions

STOCK NO	D (mm)	L (mm)
29810	15	62
29811	22	64.5
29812	28	69.5
29813	35	81
29814	42	88
29815	54	104

## Technical Data

- Max Working Pressure 5 Bar (External) / 1 Bar (Internal) @ 70°C
- "M" profile press jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid
- Suitable for above ground 2nd and 3rd family gases to EN437

## Applicable Standards

- For use with type TX copper tubing conformant to EN 1057

