


# Copper Press Male Union Conical Seal (M-Profile)



## MCP 68

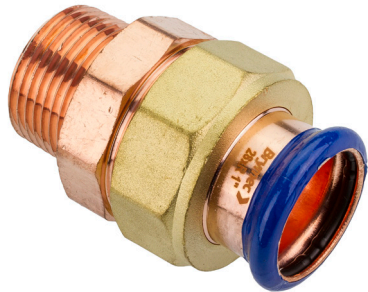

### Features & Benefits

- Durable and secure leak proof joint
- Braze free, permanent joint - no hot works required
- Huge time and resource savings
- 25 Year warranty
- Blue plastic film which will fall off when crimped for easy identification of pressed joint
- 2 point press
- Dust Covers

### Material Specifications

NO	Description	Materials
1	Body	Cu-DHP (CW024A)
2	Crimp indicator film	PVC, Blue
3	O-Ring	EPDM
4	Dust Cap	PE
5	Nut	Brass

### Product Codes and Dimensions

STOCK NO.	D1	D2	D3	D4	A	R	L1
28200	15	15.6	18	23	19	1/2"	58
28203	22	22.8	25	31.3	20	3/4"	64
28206	28	28.8	31	37.4	22	1"	71
28207	35	35.7	38.3	44.7	25	1 1/4"	81
28208	42	42.8	45.3	53.5	29	1 1/2"	85
28209	54	54.8	57.3	65.3	34	2"	98

### Technical Data

- Working Pressure 16 Bar @ 95°C
- "M" profile press jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid
- Male thread BSPT

### Applicable Standards

- WRAS approved
- For use with type TX copper tubing conformant to EN 1057
- Manufactured to EN1254 standard

